

# DC-COUPLED STORAGE SYSTEMS

## PVS-500 (500 kWAC) AND PVS-375 (375 kWAC)

### SMART and SGIP Ready

Yaskawa Solectria® Solar's PVS-500 and PVS-375 provide the most robust and reliable Utility-Scale DC-Coupled Energy Storage Systems in the industry. A Solectria® PVS DC-Coupled Energy Storage System comes with Solectria XGI 1500 inverters, a Heila Edge Plant Master Controller and a bi-directional Dynapower DPS 500 DC/DC converter. Having the energy storage and the PV array on the same inverter allows this DC-coupled system to put the excessive PV production in storage and discharge to the grid at select times and conditions to maximize the value of the system.

### MODELS AND KEY FEATURES

Model	Features
<b>PVS-500</b>	3 Solectria XGI 1500-166/166-3S Inverters rated at 498 kWac DC Re-combiner with up to 5 PV Array Inputs, allowing up to 1.25 MWdc and a DC/AC ratio of 2.5
<b>PVS-375</b>	3 Solectria XGI 1500-125/125-3S Inverters rated at 375 kWac DC Re-combiner with up to 5 PV Array Inputs, allowing up to 1.25 MWdc and a DC/AC ratio of 3.3
<b>ALL MODELS</b>	Dynapower DPS-500 DC/DC converter to interface the battery system Heila Edge controller to optimize energy utilization


### ADVANTAGES OF DC-COUPLED STORAGE

- Solar Peak Energy Re-capture
- Low-Voltage Harvesting
- Demand Charge Management
- Energy Time-Shifting
- Capacity Firming
- Ramp-Rate Control

### SYSTEM DESCRIPTION

#### The PVS Systems include:

- Optional: Solectria 1500 VDC PV Source-Circuit Combiners with 400 A switch
- Solectria XGI 1500 utility-scale string inverters with synchronized switching, operating in parallel from the DC bus
- Solectria DC Re-combiner that serves as the overall DC Bus in the system
- Solectria AC Combiner with fusing for the inverter AC outputs, a combined output fuse and master switch
- Heila Edge controller, provides control and communications to optimize the system
- Dynapower's advanced DPS-500 DC/DC converter that interfaces a storage subsystem\*

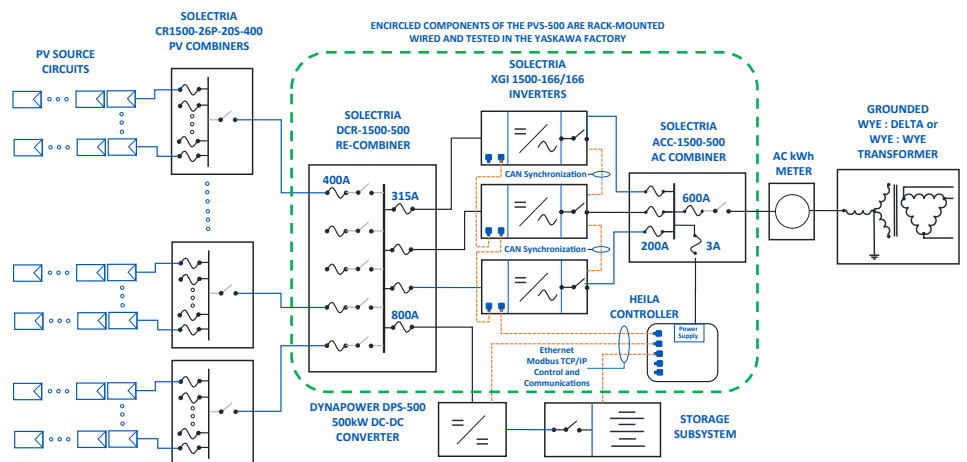

\* Storage subsystem not included. Contact sales@solectria.com for assistance with compatible storage subsystems.



### Dynapower Bi-Directional DC/DC Converters

- DPS-500 (500 kWdc) used in all DC-Coupled Storage systems
- 98.2% average efficiency
- 1500 Vdc
- Integrated fusing and switchgear
- Optimized for the Solectria XGI 1500 Inverters

# PVS-500 / PVS-375

## DC-COUPLED STORAGE SYSTEMS TECHNICAL DATA

### SPECIFICATIONS

Solectria Inverter Specifications	XGI 1500-166/166-3S	XGI 1500-125/125-3S	3 x XGI 1500-166/166-3S	3 x XGI 1500-125/125-3S
Absolute Max Input Voltage	1500 Vdc			
Max Power Voltage Range (MPPT)	860 - 1250 Vdc			
Max. PV Rated Power (STC)	332 kWdc		1.25 MWdc	
Operating Voltage Range	860 - 1450 Vdc			
Max Operating Input Current	197.7 A	148.3 A	593.1 A	444.9 A
Nominal Output Voltage	600 Vac			
Continuous Real / Apparent Power Output	166 kW / 166 kVA	125 kW / 125 kVA	498 kW / 498 kVA	375 kW / 375 kVA
Maximum AC Output Current	160 A	120 A	480 A	360 A
Total Harmonic Distortion (THD)	<3%	<3%	<3%	<3%
CEC Avg / Peak Efficiency	98.5% / 99.0%	98.5% / 98.9%	98.5% / 99.0%	98.5% / 98.9%
Certifications	CA Rule 21 & HI 14H, UL 1741SA, UL1741SB			
Warranty	5 Years			



Dynapower Converter Specifications	DPS-500
DC Input Voltage Range (Battery Port)	550 - 1500 Vdc
DC Input Voltage Range (PV Port)	550 - 1500 Vdc
Max Continuous Power Rating	500 kWdc
Max Continuous Current Rating	+/- 500 A
Avg Efficiency	98.2%
Operating Temperature Range	-25 to +50°C
Metering	Optional DC metering of converter's input or output

PV Combiner Specifications	PV Combiner Series: CR1500-xxP-yyS-400
Input Wire Compatibility	14 - 4 AWG, PV-Rated, Copper Wire Only
Output Wire Compatibility	1 Conductor at 750 kcmil / 2 Conductor at 500 kcmil
Integrated DC Disconnect	400 A, 2-pole
Fuse Configuration	Positive Polarity Fused
Number of Fuse Positions	Fuse Rating
16	20 A / 25 A / 30 A / 32 A
20	20 A / 25 A / 30 A / 32 A
24	20 A / 25 A / 30 A / 32 A
28	20 A / 25 A / 30 A / 32 A

DC Re-Combiner Specifications	DCR-1500-500 (Used for both PVS-500 and PVS-375)
PV Source Circuit Connections	5 positions, 400 A PV-rated DC fuse (pos. pole only) and Disconnect
DC/DC Converter Connection	1 position, 800 A fuse
XGI 1500 Inverter Connections	3 positions, 315 A fuse
Weight	280 lb
Enclosure Dimensions	Height: 43.3 in (1100 mm) Width: 74.8 in (1900 mm) Depth: 6.65 in (169 mm)

AC Re-Combiner Specifications	ACC-1500-500
DC-Coupled Storage System Compatibility	PVS-500 and PVS-375
XGI 1500 Inverter Connections	3 positions, 200 A fuse
Main Fuse and Switch Rating	600 A fuse, 600 A switch
Weight	110 lb
Enclosure Dimensions	Height: 51.2 in (1300 mm) Width: 40.0 (1015 mm) Depth: 8.66 (220 mm)

HEILA Edge Controller Specifications	HEILA Edge Controller
Grid Integration Capabilities	DNP3, Multi-speak, IEEE-2030.5, IEC-61850, OpenADR
Battery, Meter and Sensor Integration Capabilities	Modbus TCP/RTU, CAN bus, BACnet, analog/digital signals
Operational Capabilities	Cloud-based access, data and event logs visualization, archival, reporting, and exporting
Autonomous Operational Capabilities	Local network, all metrics acquired and stored locally

