

**YASKAWA**

# XGI 1000 Wiring Box Options

Provide Increased Design Flexibility



Yaskawa Solectria Solar's XGI 1000 commercial string inverters are configured in the factory with the features to meet the varying needs of each system. Select a standard model with either 4 MPPT (Independent Mode) or a single MPPT (Combined Mode); upgrade either model to the Large AC Lugs Wiring Box to reduce AC voltage drop.

## Standard Wiring Box - 4 MPPT

Independent Mode

<b>DC Fuseholders</b>	12-8AWG Cu only
<b>AC Terminals</b>	3AWG-1/0 Cu or 1AWG-1/0 Al
<b>N and PE</b>	8-4AWG Cu or 6-4AWG Al
<b>Max PV Current (Isc x 1.25)</b>	50A per MPPT Zone

## Standard Wiring Box - 1 MPPT

Combined Mode

<b>DC Fuseholders</b>	12-8AWG Cu only
<b>AC Terminals</b>	3AWG-1/0 Cu or 1AWG-1/0 Al
<b>N and PE</b>	8-4AWG Cu or 6-4AWG Al
<b>Max PV Current (Isc x 1.25)</b>	180A

## Large AC Lugs Wiring Box - 4 MPPT

## Large AC Lugs Wiring Box - 1 MPPT

Accommodates Large AC Conductors for Lower Voltage Drop

<b>DC Fuseholders</b>	12-8AWG Cu only
<b>AC Terminals</b>	3AWG-3/0 Cu or 1AWG-3/0 Al
<b>N and PE</b>	6-1/0AWG Cu or 6-1/0AWG Al

Contact Yaskawa Solectria Solar for more information. Email [inverters@solectria.com](mailto:inverters@solectria.com) or call 978-683-9700.

## SOLECTRIA SOLAR


**Yaskawa Solectria Solar**  
360 Merrimack Street  
Lawrence, MA 01843  
[solectria.com](http://solectria.com)

1-978-683-9700  
[inverters@solectria.com](mailto:inverters@solectria.com)

Document FL.XGI100.02  
Rev D, 10/28/2020  
© 2020 Yaskawa Solectria Solar



Standard Wiring Box

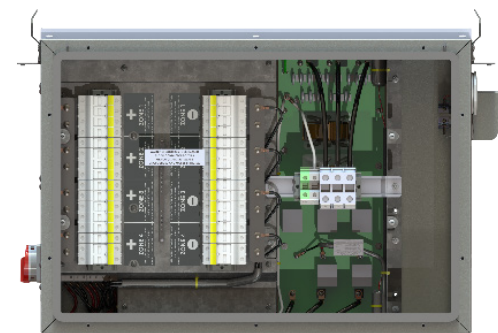

Large AC Terminal Wiring Box

# YASKAWA